

Topog-E® Series 3000ET

MATERIAL COMPOSITION AND APPLICATION

This form of joint sealant is specially processed by expanding 100% pure polytetra-fluoroethylene (PTFE). It provides a soft, highly compressible gasket for longer life and trouble-free sealing. Its form-in-place versatility cuts maintenance and storage costs. The high compressibility of **Topog-E® Series 3000ET** enables it to effectively fill flange imperfections for a tight, leak-free seal. Under pressure, it provides a very wide, thin ribbon-like joint sealant. Unlike conventional PTFE which is prone to cold flow, **Topog-E® Series 3000ET** has good creep resistance and bolt torque retention properties. It does not support bacterial growth or cause product contamination and is FDA compliant. It has virtually no shelf-life concerns since PTFE is unaffected by normal environmental conditions.

Topog-E® Series 3000ET has excellent resistance properties to chemical attack with a pH range of 0-14. It is ideal for most chemical services at temperatures to 600°F (316°C) and pressure to 3,000 psi (207 bar). It is also suitable for cryogenic use to -321°F (-196°C).

The sealant is available in roll form which helps reduce storage space, and is available in a wide variety of thicknesses and lengths.


EASY TO INSTALL

- Clean the sealing face
- Select size 1/3 to 1/2 flange sealing width
- Cut length needed to allow for overlapping
- Peel adhesive backing and apply to flange
- Overlap the sealant at a bolt
- Bolt up using recommended bolting procedures

ORDERING

Please either contact your local distributor for **Topog-E® Series 3000ET** or contact Topog-E® directly for details of your nearest distributor.

| WIDTH | BOILER-MATE | STANDARD LENGTH | BULK LENGTH |
|-------|---------------------------|--------------------------|---------------------------|
| 1/8" | N/A | 50 Feet E3000-012-050 | 100 Feet E3000-012-100 |
| 3/16" | N/A | 75 Feet E3000-018-075 | 150 Feet E3000-018-150 |
| 1/4" | 100 Inches E3000BM-025 | 50 Feet E3000-025-050 | 100 Feet E3000-025-100 |
| 3/8" | 100 Inches E3000BM-037 | 25 Feet E3000-037-025 | 50 Feet E3000-037-050 |
| 1/2" | 56 Inches E3000BM-050 | 15 Feet E3000-050-015 | 30 Feet E3000-050-030 |
| 5/8" | 50 Inches E3000BM-062 | 15 Feet E3000-062-015 | 30 Feet E3000-062-030 |
| 3/4" | 43 Inches E3000BM-075 | 15 Feet E3000-075-015 | 30 Feet E3000-075-030 |
| 1" | N/A | 15 Feet E3000-100-015 | 30 Feet E3000-100-030 |
| | | | 75 Feet E3000-100-75 |

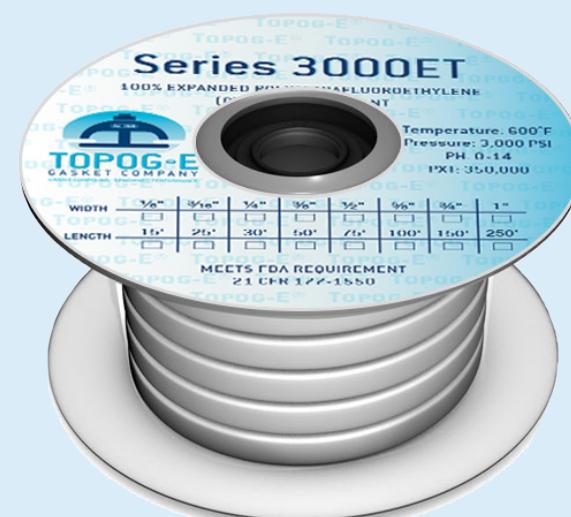

Topog-E, LLC · 1150 Guadalupe Drive · Cibolo, Texas 78108
918-587-6649 · info@topog-e.com · www.topog-e.com

All information in this data sheet is based on data believed to be reliable; however, we make no guarantee or warranty of the performance of Topog-E® Series 3000 ET gaskets. Due to numerous application-specific factors that can influence service life, it is always advisable to first test Topog-E® Series 3000 ET gaskets in a particular application to determine their ultimate suitability.